


family kompakt

made
in
germany

CE
EN 13561



Type C



Type D




Close-fitting
cassette awning
that is easy
to operate

Lewens
SONNENSCHUTZ-SYSTEME

GmbH & Co. KG



Close-fitting
cassette awning
that is easy
to operate

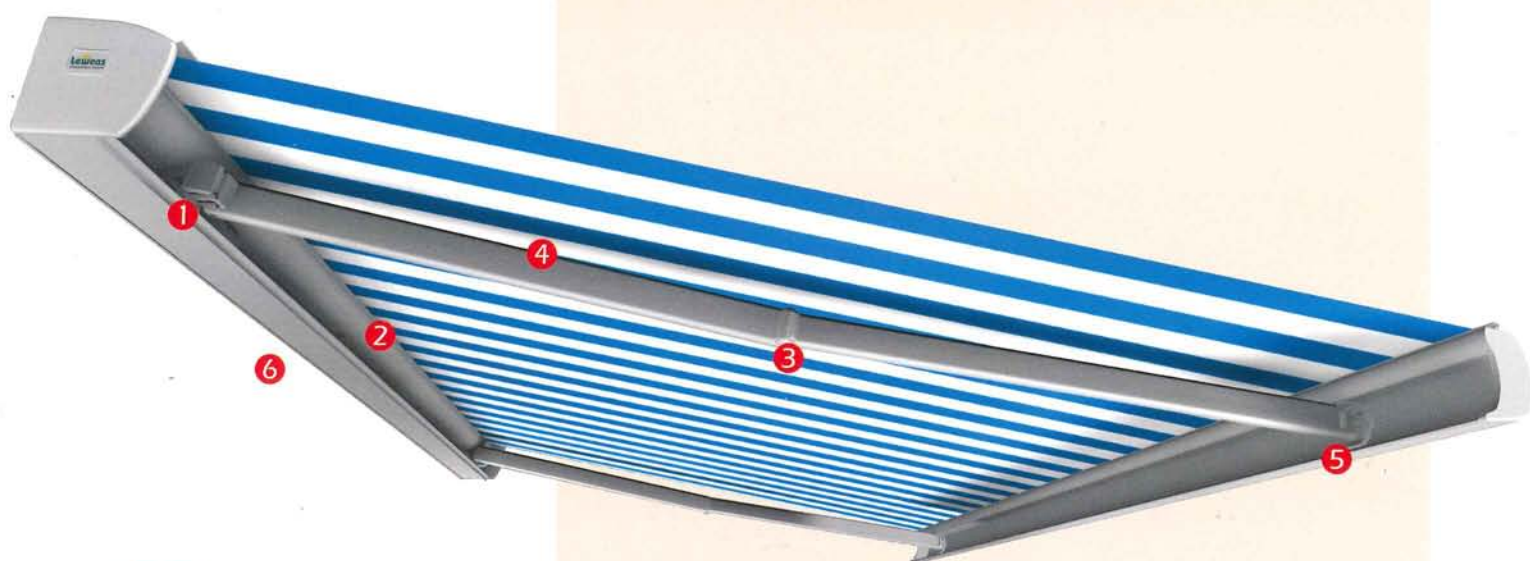

Ease of operation and excellent technical features are two of the outstanding aspects of this top-quality cassette awning that fits snugly against the wall.

- **Front profile** with very sturdy double hollow chamber and integral rain gutter. Water drains off at the side through the end caps, front profile always sits close to the case.
- A 40 x 40 x 2 mm **console tube**, galvanized and powder-coated, is used.
- **Rust-resistant pins** in Teflon-coated bearings.
- High-grade steel screws.
- The support tube is open on Type C and D models for **easy assembly**.
- **Valance** available as an optional extra.

Fabric cover shell ▶
The fabric cover shell offers an elegant solution for concealing the fabric roller.




The Family Kompakt awning comes in two versions:

- **Family Kompakt Type C**,
Closed on **3 sides**,
- **Family Kompakt Type D**,
Closed on **4 sides**,
with unique **protective fabric casing**

The **extremely high spring tension** of the hinged arms ensures a superbly taut sit of the fabric.

- No resting of the awning cloth on the arm joints.
- Hinged arm joints feature a pin made of high-grade steel.

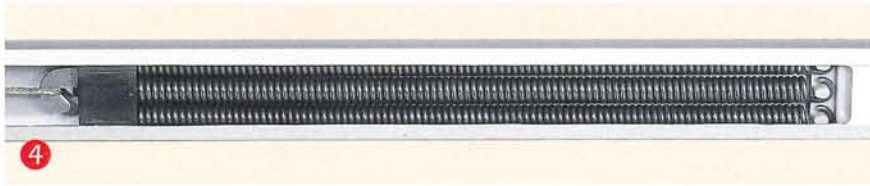

4

Arm bracket ▶

Of extruded high-strength aluminium alloy, with supporting and anchor screw.



1



3

◀ **Hinged arm joint**

The double cables are plastic-coated to prevent soiling and corrosion of the cables caused by exposure to the environment.

This results in a threefold increase in the service life of the cables (60-80,000 load changes).

- Double cables conforming to aircraft quality standard.
- Arm profile and cables of the same colour.

Front profile bracket ▶
An adjustable bracket ensures the front profile is always vertical. A special mechanism ensures reliable positive closing when the awning is retracted.



5

Back plate (Type D)

Rounded design for a harmonious appearance from the rear. Protects the awning fabric. Below it is the console tube, 40 x 40 x 2 mm, with wall and ceiling consoles for secure attachment to wall or ceiling.



6



▲ **Fabrics**

Our new collection offers a wide range of patterns spanning the entire colour spectrum.

End caps ▶

The plastic end caps can be colour-matched to the awning fabric.





Technical features and fitting options

Type C

Type D

Technical features

Width

- Up to 650 cm with 2 hinged arms
- Up to 1300 cm, 2 units linked with 4 hinged arms
- Up to 1950 cm, 3 units linked with 6 hinged arms

Arm lengths

150/200/250/300/350 cm
Special lengths on request

Drive


Electric motor fitted as standard, bevel gear available on request (price reduction).
On linked units always electric motor.

Special equipment



Sun and wind sensor, radio control

Framework colours



- Silver anodized E6/EV1, small components powder-coated grey RAL 7035
- White powder-coated RAL 9016
- Brown powder-coated RAL 8077
- Special coating possible in all RAL colours

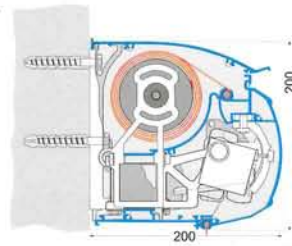


Wall

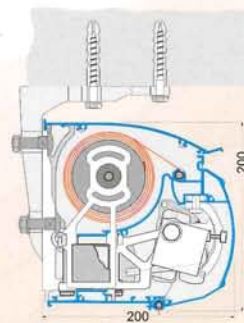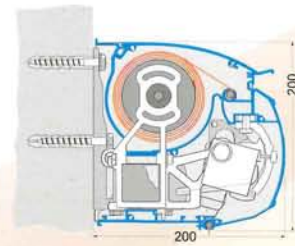

Ceiling

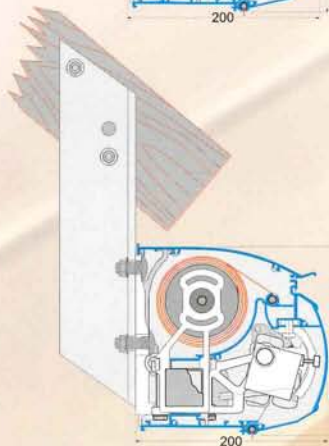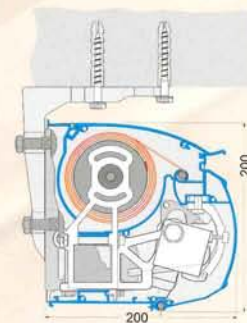

Rafter

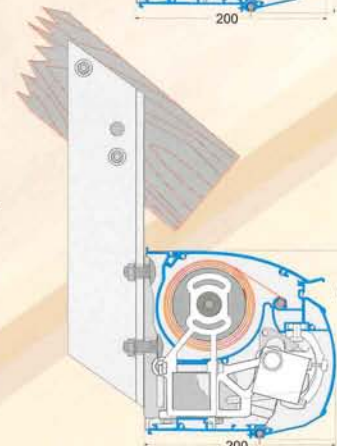

Lewens
SONNENSCHUTZ-SYSTEME GmbH & Co. KG

Your stockist

